



California Faucets®

SH-25-XX

(XX = Series Style for CF Faucets Sets) Handshower Supply and Holder Installation Instructions



CALIFORNIA FAUCETS RECOMMENDS THAT ALL PLUMBING PRODUCTS BE INSTALLED BY A LICENSED PROFESSIONAL

IMPORTANT: Read all instructions prior to installation and provide copy of instructions to consumer.

PREPARING WALL FOR HOLDER

IMPORTANT: It is the **RESPONSIBILITY** of the **INSTALLER** to provide a proper cross **SUPPORT (1)** and securely install supply **PIPE (2)** to provide adequate support for the Handshower Holder.

- Securely mount a 2x4 cross **SUPPORT (1)** with front surface flush between studs in wall to provide proper support for Handshower Supply and **PIPE (2)**
- Hole **OPENING (5)** shall be Maximum $\varnothing 1-1/4"$
- **Water supply** **PIPE (2)** shall be installed securely to 2x4 cross **SUPPORT (1)** using appropriate **Pipe Clamp**

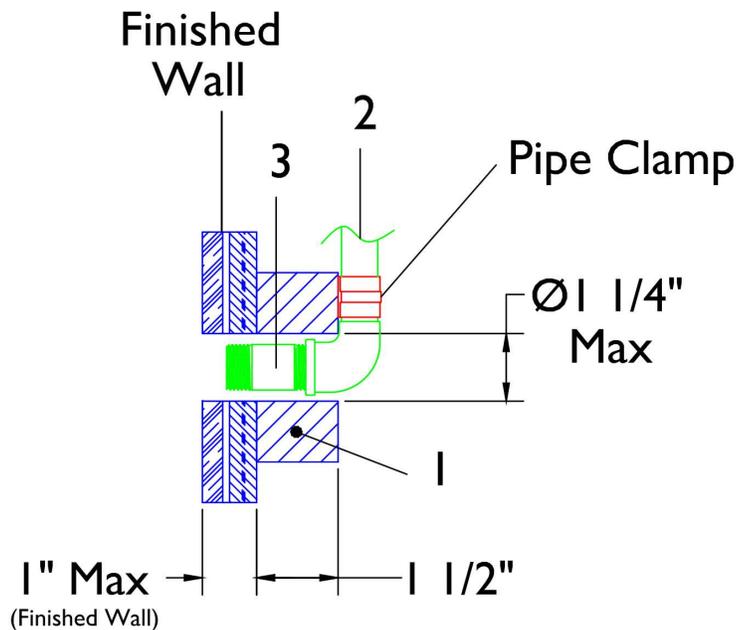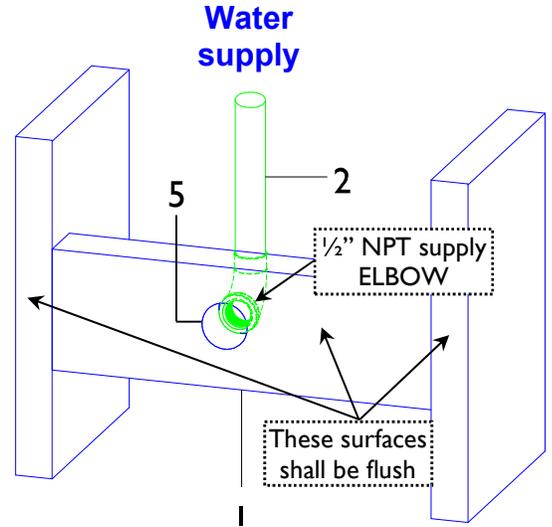


2 INSTALLING SUPPLY

NOTE: Following is to be done when finished wall is completed.

- Apply 3 wraps of Teflon® TAPE (6) on appropriated length ½" NPT NIPPLE (3) threads and thread into SUPPLY (4)
- Apply 3 wraps of Teflon® TAPE (6) to other end of ½" NPT NIPPLE (3) and insert through finished wall OPENING (5)
- Tighten SUPPLY (4) to wall by using SCREWDRIVER (7) in supply OUTLET (4c)





IMPORTANT: Do not tighten by using HOOK (4b) as this will damage HOOK.

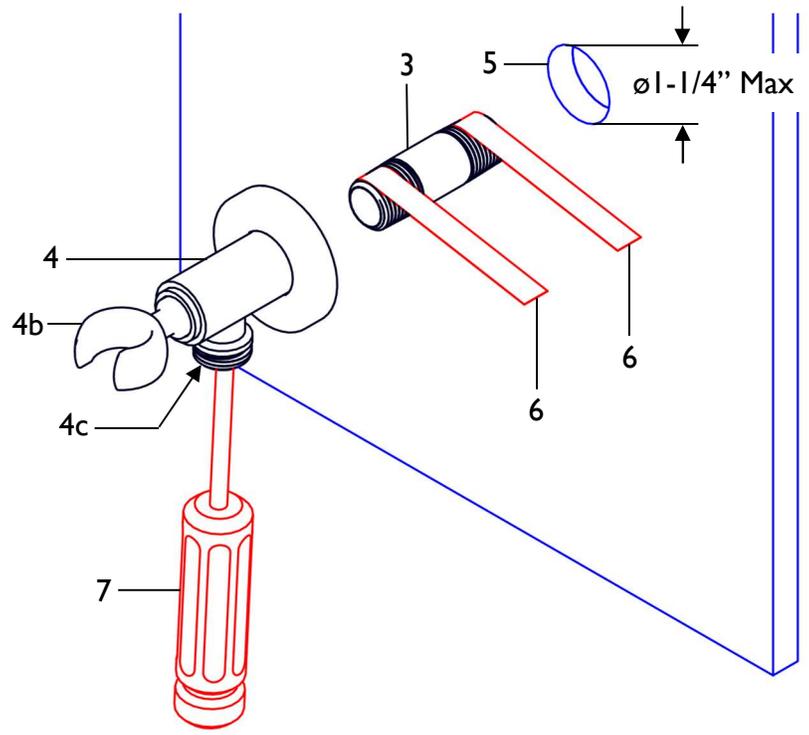

3 ALIGNING HOLDER

- If necessary, use hex KEY (8) to loosen SETSCREW (4a) located on bottom of SUPPLY (4) to adjust HOOK (4b)
- Tighten SETSCREW (4a) once desired HOOK (4b) position is set

NOTE: Smaller outer diameter is top side of HOOK (4b).

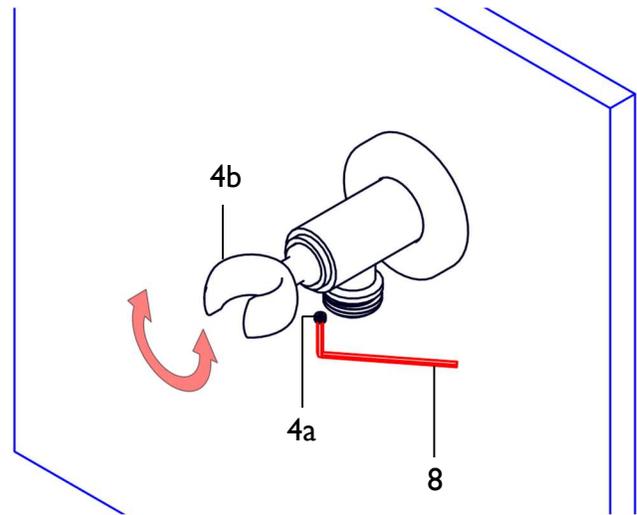

4 FLUSHING SYSTEM

- Before attaching any Handshower, turn on shower and flush holder for 2 minutes; check for any leaks at all fittings

