


FEATURES

- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connections
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

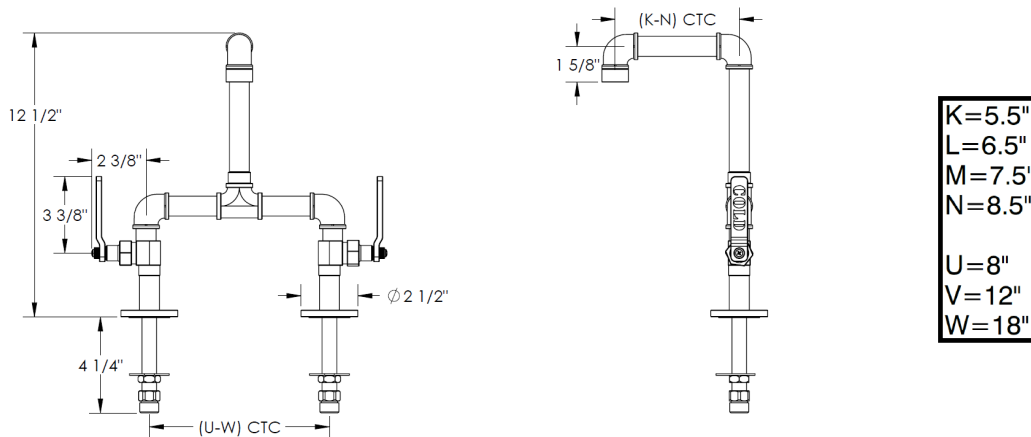

ITEM NO.	PART NUMBER	QTY.
4H/4C	CRT502 (HOT/COLD)	2
5	38-7.5- (K-N) - PIPE-ASSY	1
6	38-7.5 - (U-W) - PIPE-ASSY	1
13	38-2.3-ESC	2
14	EV4-LVR-H2	1
15	EV4-LVR-C2	1
17	142-HRS-SHOE-WSHR	2
18	142-LOCK-NUT	2
19	.375-FNPS-.5-MNPS-ADAP	2
20	142-TEE-GSKT	2
21	EV4-POST-CAP	2
22	CR-PHMS 0.164-32x0.375x0.375-S	2
23	NEOPERL CACHE AERATOR	1
24	CV15 SHORT	2
25	22-2-1.8IN GASKET	2
28	AS568 - 013	2
29	SWVL-PLSTC-BSHNG	1
30	SSCUPSKT 0.19-32x0.1875-HX-S	1

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 718-257-2800

