


FEATURES


- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.2 gpm (4.5 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.): 10
- Shipping dimensions (in.): 29x12x4

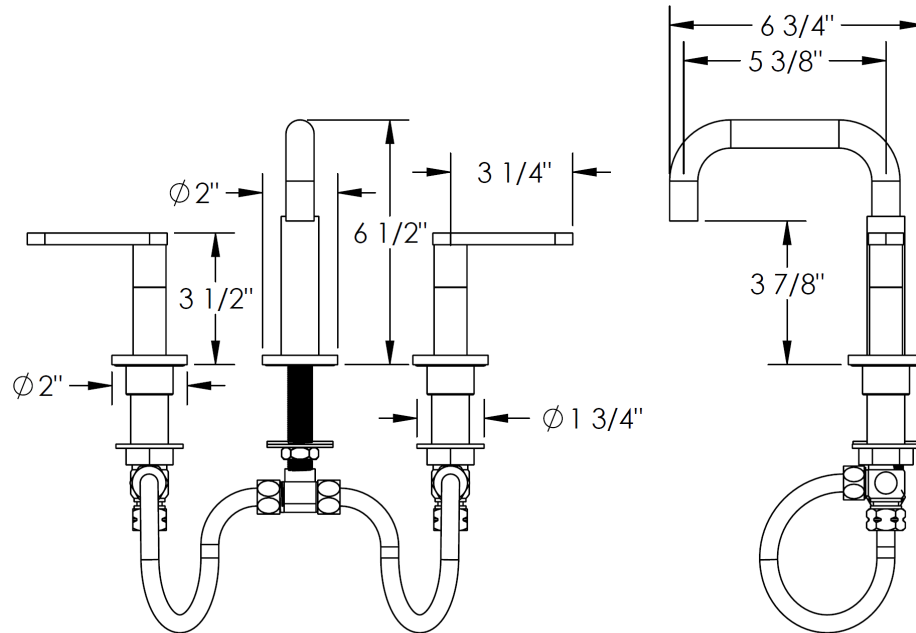


ITEM NO.	PART NUMBER	QTY.
1	70-2-SPT-ASSY	1
2	NEOPERL CACHE TT	1
3	AS568 - 131	1
4	142-LOCK-NUT	1
5	142-TEE-GSKT	1
6	142-TEE	1
7	144-STL-WSHR	1
8	144-RBBR-WSHR	1
9	CL16-TOP-LOCK-NUT-LONG	2
10	502-PLSTC-LOCK-NUT	2
11C/11H	CRT502	2
12C/12H	SS-502-VALVE-BODY	2
13	502 FLEX HOSE	2

HANDLE TRIM


CODE: RNS4

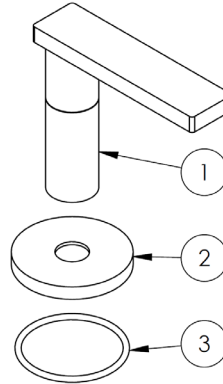


ITEM NO.	PART NUMBER	QTY.
1	RNS4-HNDL	1
2	RNS4-ESC-RING	1
3	AS568 - 131	1

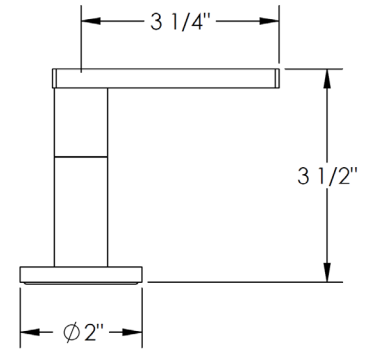

CODE: RNK8

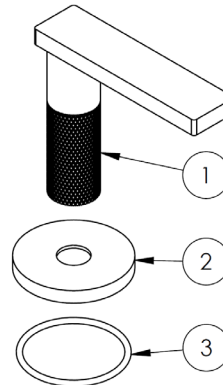

ITEM NO.	PART NUMBER	QTY.
1	RNK8-HNDL	1
2	RNS4-ESC-RING	1
3	AS568 - 131	1

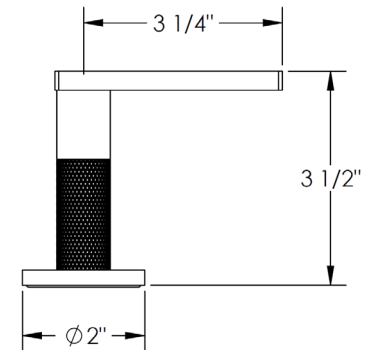

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 718-257-2800

Rev. 3/20